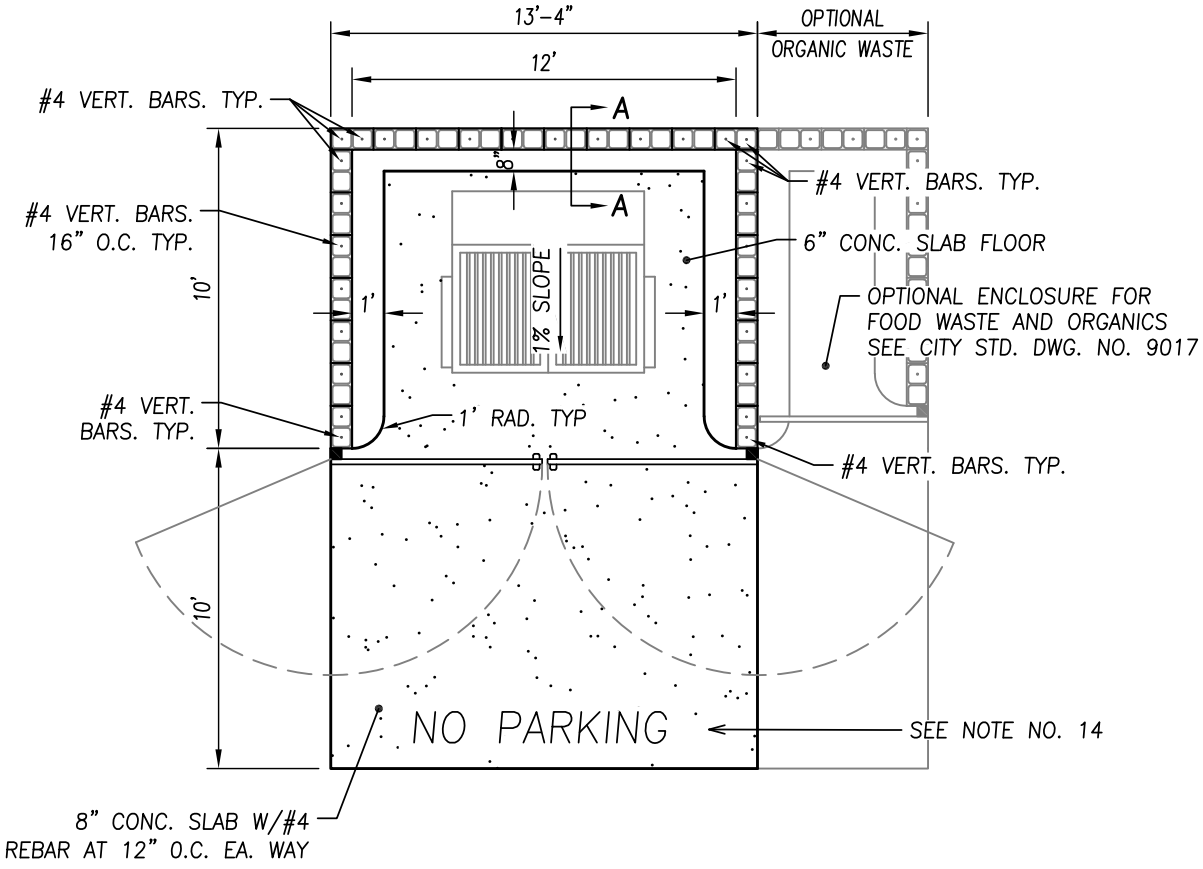

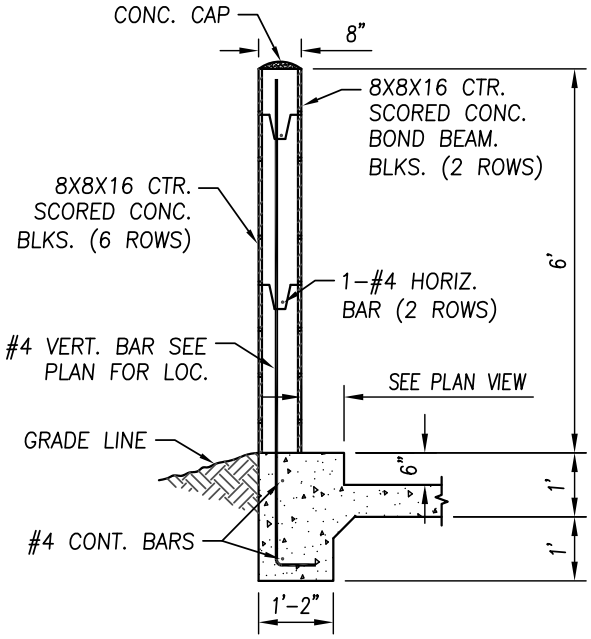

SECTION A-A

NOTES:

1. ALL CELLS IN CONC. BLOCKS SHALL BE FILLED SOLID WITH COURSE GROUT, MINIMUM 2000 PSI AT 28 DAYS.
2. CORNER BLOCK ENDS AND CENTER WEB SHALL BE CUT TO FORM CONCRETE BOND BEAM.
3. ALL HORIZONTAL AND VERTICAL JOINTS SHALL BE RAKED TO MATCH CENTER SCORED BLOCK.
4. CONC. BLOCK, MORTAR AND COARSE GROUT SHALL CONFORM WITH CBC, LATEST EDITION. BLOCKS SHALL BE 8"X8"X16" AND MINIMUM 2000 PSI.
5. REBAR SHALL BE GRADE 60 WITH A MINIMUM YIELD STRENGTH OF 60,000 PSI.
6. SLAB FLOOR & FOOTING SHALL BE CLASS 2 CONCRETE.
7. GROUND TO BE SLOPED 1% AWAY FROM WALLS.
8. LOCATION OF TRASH ENCLOSURE TO BE APPROVED BY THE SOLID WASTE DIVISION OF THE CITY OF TULARE.
9. THIS ENCLOSURE IS FOR STORAGE OF CITY OF TULARE SOLID WASTE CONTAINERS ONLY.
10. HINGES SHALL BE ATTACHED TO THE FRONT AND OUTSIDE OF ENCLOSURE WALL, AND OUTSIDE OF CENTER POST.
11. GATES SHALL BE METAL WITH SELF-CLOSING HINGES AND CANE BOLTS/SLEEVES IN OPEN AND CLOSED POSITIONS.
12. HUNG GATES SHALL SWING OPEN TO 180 DEGREES FROM THE CLOSED POSITION AND HAVE A 4" CLEARANCE ABOVE FINISHED PAD OR APRON.
13. GATE POST, GATE POST FOOTINGS, AND GATES SHALL BE DESIGNED BY A REGISTERED ENGINEER OR ARCHITECT AND APPROVED BY THE CITY OF TULARE.
14. ENCLOSURE IS SUBJECT TO FINAL INSPECTION BY THE CITY OF TULARE SOLID WASTE DIVISION AND IS SUBJECT TO RECONSTRUCTION AT OWNER'S EXPENSE IF STANDARDS ARE NOT MET.
15. "NO PARKING" SHALL BE PAINTED AT THE END OF THE CONCRETE APRON IN 12" TALL, RED LETTERING.

REVISIONS	DATE
1. ENCLOSURE SIZE AND GATE CONFIG.	11/19/19

CITY OF TULARE
PUBLIC IMPROVEMENT STANDARD

NON-ACCESSIBLE SINGLE
WIDE TRASH ENCLOSURE

DRAWING NO.: 9010

Approved By:

Date:11/19/19 City Engineer

1 OF 1

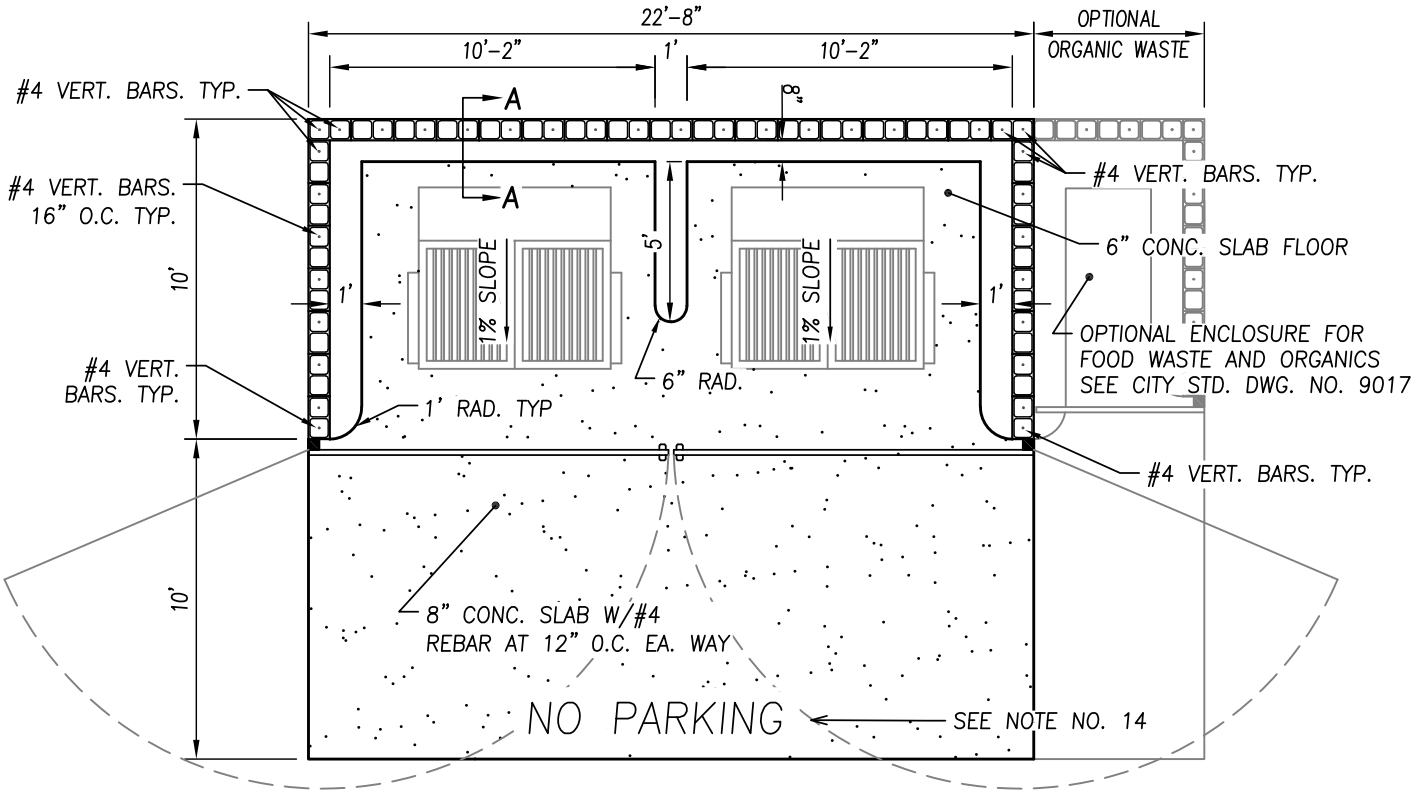

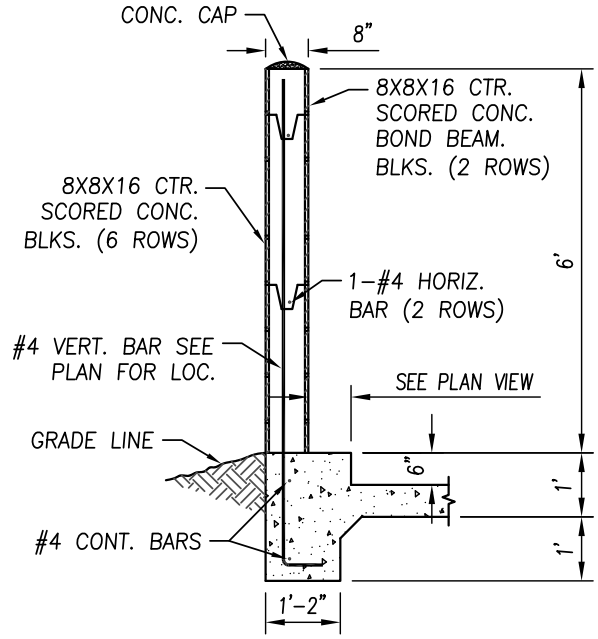

SECTION A-A

NOTES:

1. ALL CELLS IN CONC. BLOCKS SHALL BE FILLED SOLID WITH COURSE GROUT, MINIMUM 2000 PSI AT 28 DAYS.
2. CORNER BLOCK ENDS AND CENTER WEB SHALL BE CUT TO FORM CONCRETE BOND BEAM.
3. ALL HORIZONTAL AND VERTICAL JOINTS SHALL BE RAKED TO MATCH CENTER SCORED BLOCK.
4. CONC. BLOCK, MORTAR AND COARSE GROUT SHALL CONFORM WITH CBC, LATEST EDITION. BLOCKS SHALL BE 8"X8"X16" AND MINIMUM 2000 PSI.
5. REBAR SHALL BE GRADE 60 WITH A MINIMUM YIELD STRENGTH OF 60,000 PSI.
6. SLAB FLOOR & FOOTING SHALL BE CLASS 2 CONCRETE.
7. GROUND TO BE SLOPED 1% AWAY FROM WALLS.
8. LOCATION OF TRASH ENCLOSURE TO BE APPROVED BY THE SOLID WASTE DIVISION OF THE CITY OF TULARE.
9. THIS ENCLOSURE IS FOR STORAGE OF CITY OF TULARE SOLID WASTE CONTAINERS ONLY.
10. HINGES SHALL BE ATTACHED TO THE FRONT AND OUTSIDE OF ENCLOSURE WALL, AND OUTSIDE OF CENTER POST.
11. GATES SHALL BE METAL WITH SELF-CLOSING HINGES AND CANE BOLTS/SLEEVES IN OPEN AND CLOSED POSITIONS.
12. HUNG GATES SHALL SWING OPEN TO 180 DEGREES FROM THE CLOSED POSITION AND HAVE A 4" CLEARANCE ABOVE FINISHED PAD OR APRON.
13. GATE POST, GATE POST FOOTINGS, AND GATES SHALL BE DESIGNED BY A REGISTERED ENGINEER OR ARCHITECT AND APPROVED BY THE CITY OF TULARE.
14. ENCLOSURE IS SUBJECT TO FINAL INSPECTION BY THE CITY OF TULARE SOLID WASTE DIVISION AND IS SUBJECT TO RECONSTRUCTION AT OWNER'S EXPENSE IF STANDARDS ARE NOT MET.
15. "NO PARKING" SHALL BE PAINTED AT THE END OF THE CONCRETE APRON IN 12" TALL, RED LETTERING.

REVISIONS	DATE
1. ENCLOSURE SIZE AND GATE CONFIG.	11/19/19

CITY OF TULARE
PUBLIC IMPROVEMENT STANDARD

NON-ACCESSIBLE DOUBLE WIDE TRASH ENCLOSURE

DRAWING NO.: 9015

Approved By: Michael W Miller

Date: 11/19/19 City Engineer

1 OF 1

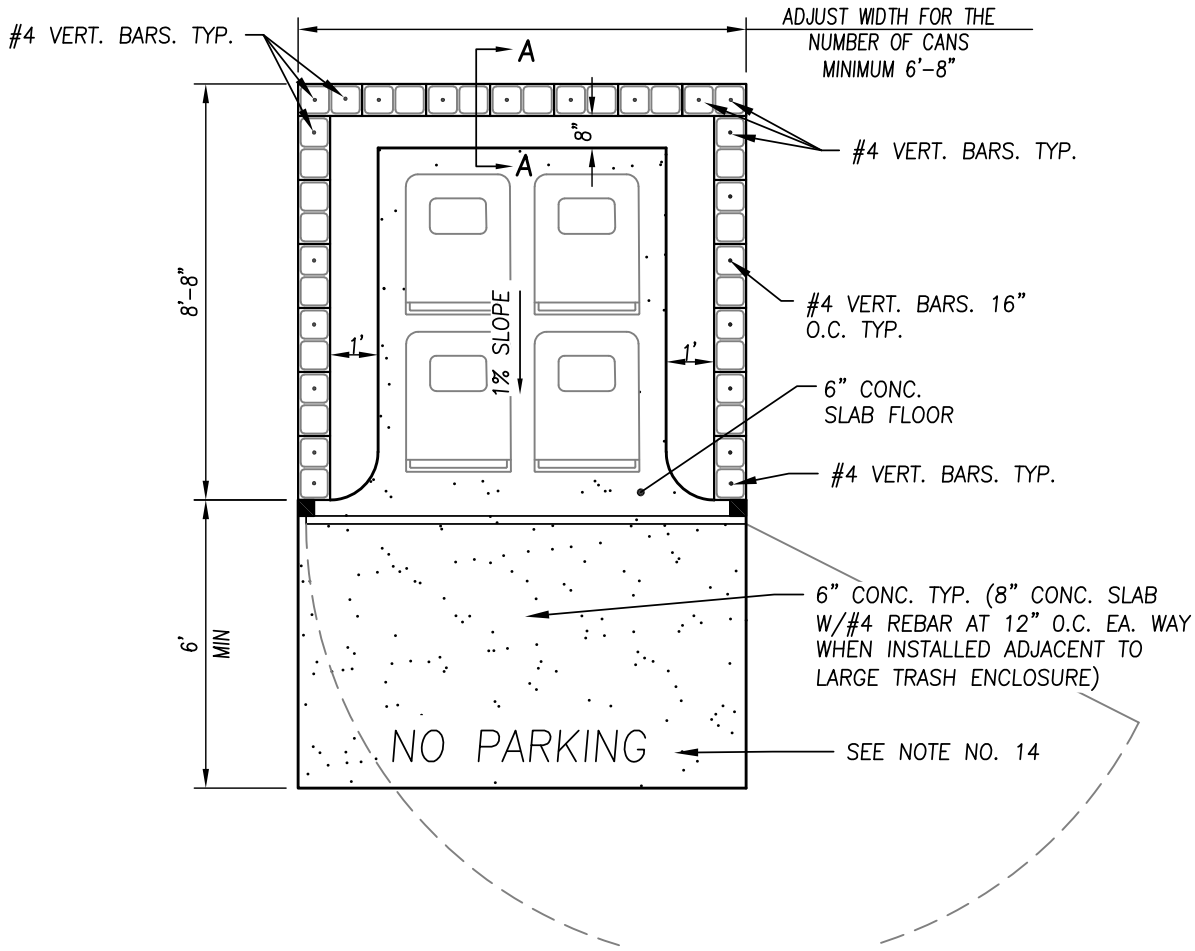

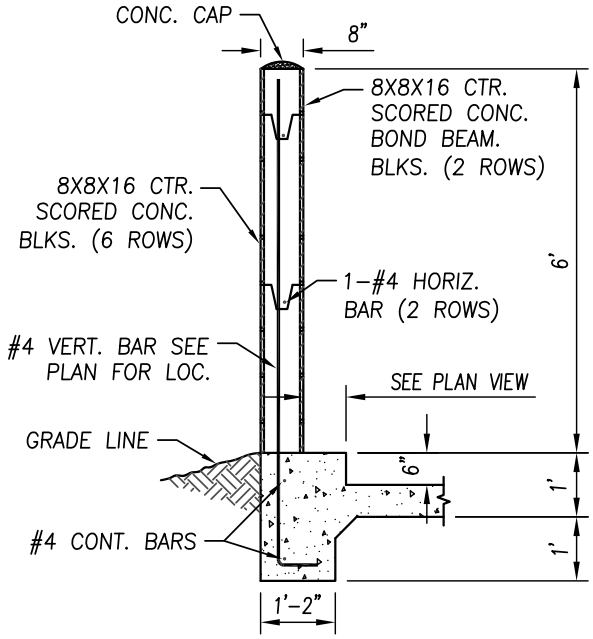

SECTION A-A

NOTES:

1. ALL CELLS IN CONC. BLOCKS SHALL BE FILLED SOLID WITH COURSE GROUT, MINIMUM 2000 PSI AT 28 DAYS.
2. CORNER BLOCK ENDS AND CENTER WEB SHALL BE CUT TO FORM CONCRETE BOND BEAM.
3. ALL HORIZONTAL AND VERTICAL JOINTS SHALL BE RAKED TO MATCH CENTER SCORED BLOCK.
4. CONC. BLOCK, MORTAR AND COARSE GROUT SHALL CONFORM WITH CBC, LATEST EDITION. BLOCKS SHALL BE 8"X8"X16" AND MINIMUM 2000 PSI.
5. REBAR SHALL BE GRADE 60 WITH A MINIMUM YIELD STRENGTH OF 60,000 PSI.
6. SLAB FLOOR & FOOTING SHALL BE CLASS 2 CONCRETE.
7. GROUND TO BE SLOPED 1% AWAY FROM WALLS.
8. LOCATION OF TRASH ENCLOSURE TO BE APPROVED BY THE SOLID WASTE DIVISION OF THE CITY OF TULARE.
9. THIS ENCLOSURE IS FOR STORAGE OF CITY OF TULARE SOLID WASTE CONTAINERS ONLY.
10. HINGES SHALL BE ATTACHED TO THE FRONT AND OUTSIDE OF ENCLOSURE WALL, AND OUTSIDE OF CENTER POST.
11. GATES SHALL BE METAL WITH SELF-CLOSING HINGES AND CANE BOLTS/SLEEVES IN OPEN AND CLOSED POSITIONS.
12. HUNG GATES SHALL SWING OPEN TO 180 DEGREES FROM THE CLOSED POSITION AND HAVE A 4" CLEARANCE ABOVE FINISHED PAD OR APRON.
13. GATE POST, GATE POST FOOTINGS, AND GATES SHALL BE DESIGNED BY A REGISTERED ENGINEER OR ARCHITECT AND APPROVED BY THE CITY OF TULARE.
14. ENCLOSURE IS SUBJECT TO FINAL INSPECTION BY THE CITY OF TULARE SOLID WASTE DIVISION AND IS SUBJECT TO RECONSTRUCTION AT OWNER'S EXPENSE IF STANDARDS ARE NOT MET.
15. "NO PARKING" SHALL BE PAINTED AT THE END OF THE CONCRETE APRON IN 8" TALL, RED LETTERING.

REVISIONS	DATE

CITY OF TULARE
PUBLIC IMPROVEMENT STANDARD

CAN ROLLOUT TRASH ENCLOSURE

DRAWING NO.: 9017

Approved By: Michael W Miller

Date: 11/19/19 City Engineer

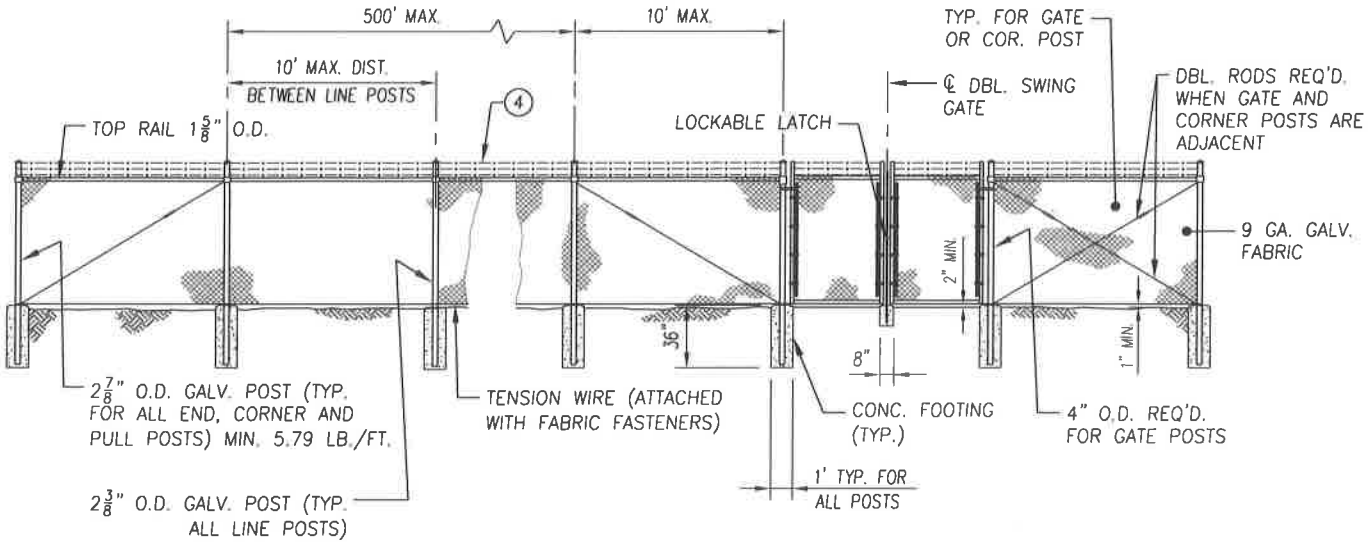

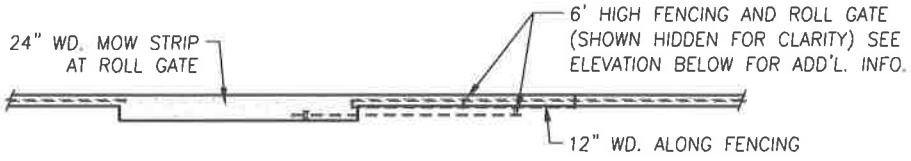

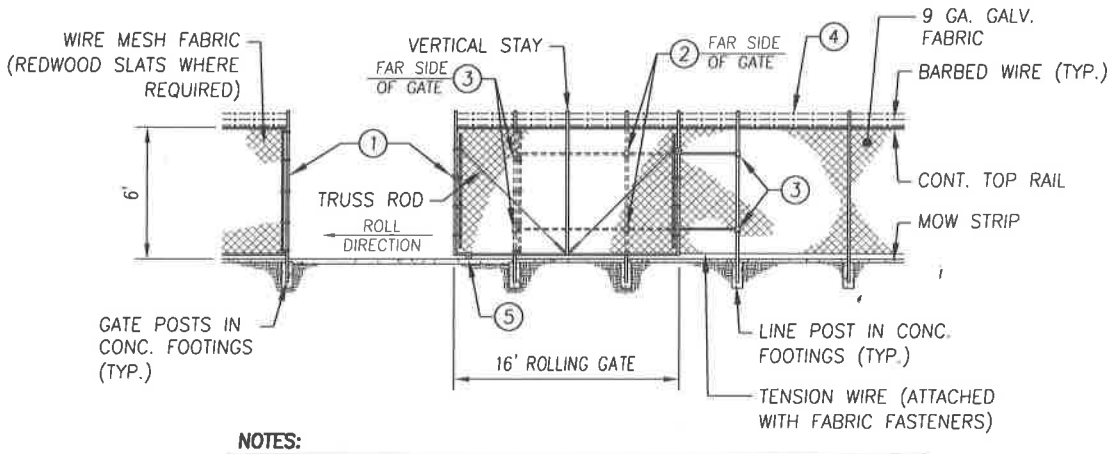

NOTES:

1. GATE FRAME AND ROLLING GATE PIPE TRACK SHALL BE $1\frac{7}{8}$" PIPE.
2. VERTICAL STAY SHALL BE $1\frac{5}{8}$" PIPE.
3. USE $\frac{3}{8}$" STEEL TRUSS RODS WITH TURN BUCKLES.
4. THE CITY ENGINEER MAY REQUIRED BARBED WIRE.
5. REFER TO CITY OF TULARE TECHNICAL SPECIFICATIONS.



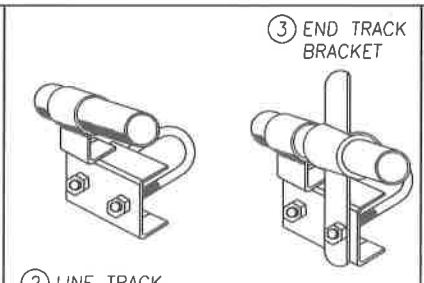





REVISIONS	DATE

CITY OF TULARE
PUBLIC IMPROVEMENT STANDARD

CHAINLINK FENCE AND GATES

DRAWING NO.: 9110

Approved By: Michael W. Miller
Date: 11/15/16 City Engineer

1 OF 1

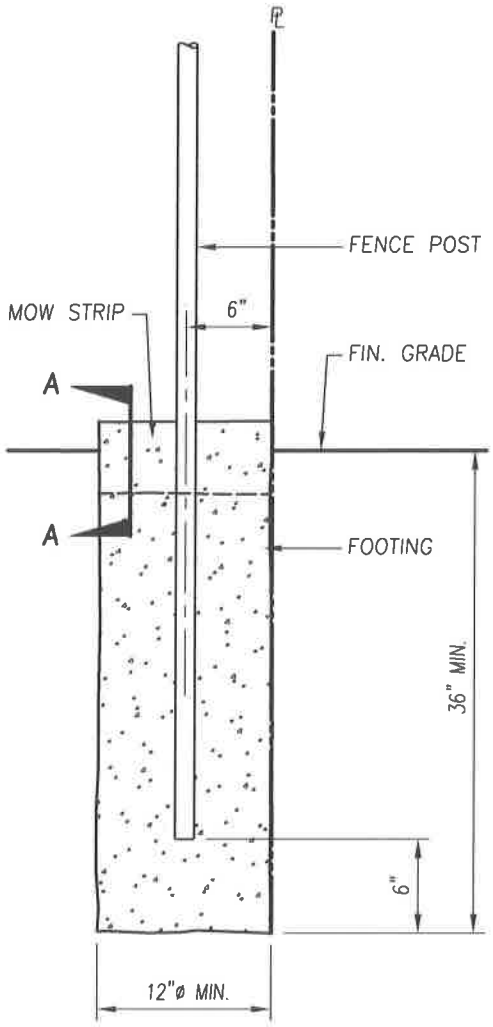

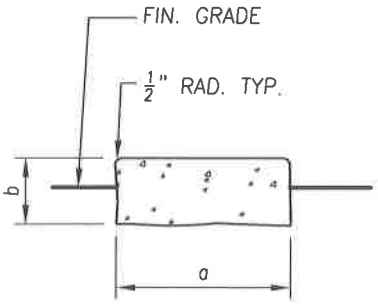

SECTION A–A
MOW STRIP DETAIL

MOW STRIP DIMENSIONS (INCHES)

LOCATION	a	b
ROLLING GATES	24	8
SWING TRAFFIC GATES	12	8
OTHER	12	6

REVISIONS	DATE

CITY OF TULARE
PUBLIC IMPROVEMENT STANDARD

FENCE FOOTING AND MOW STRIP

DRAWING NO.: 9115

Approved By: Michael W. Miller
Date: 11/15/16 City Engineer

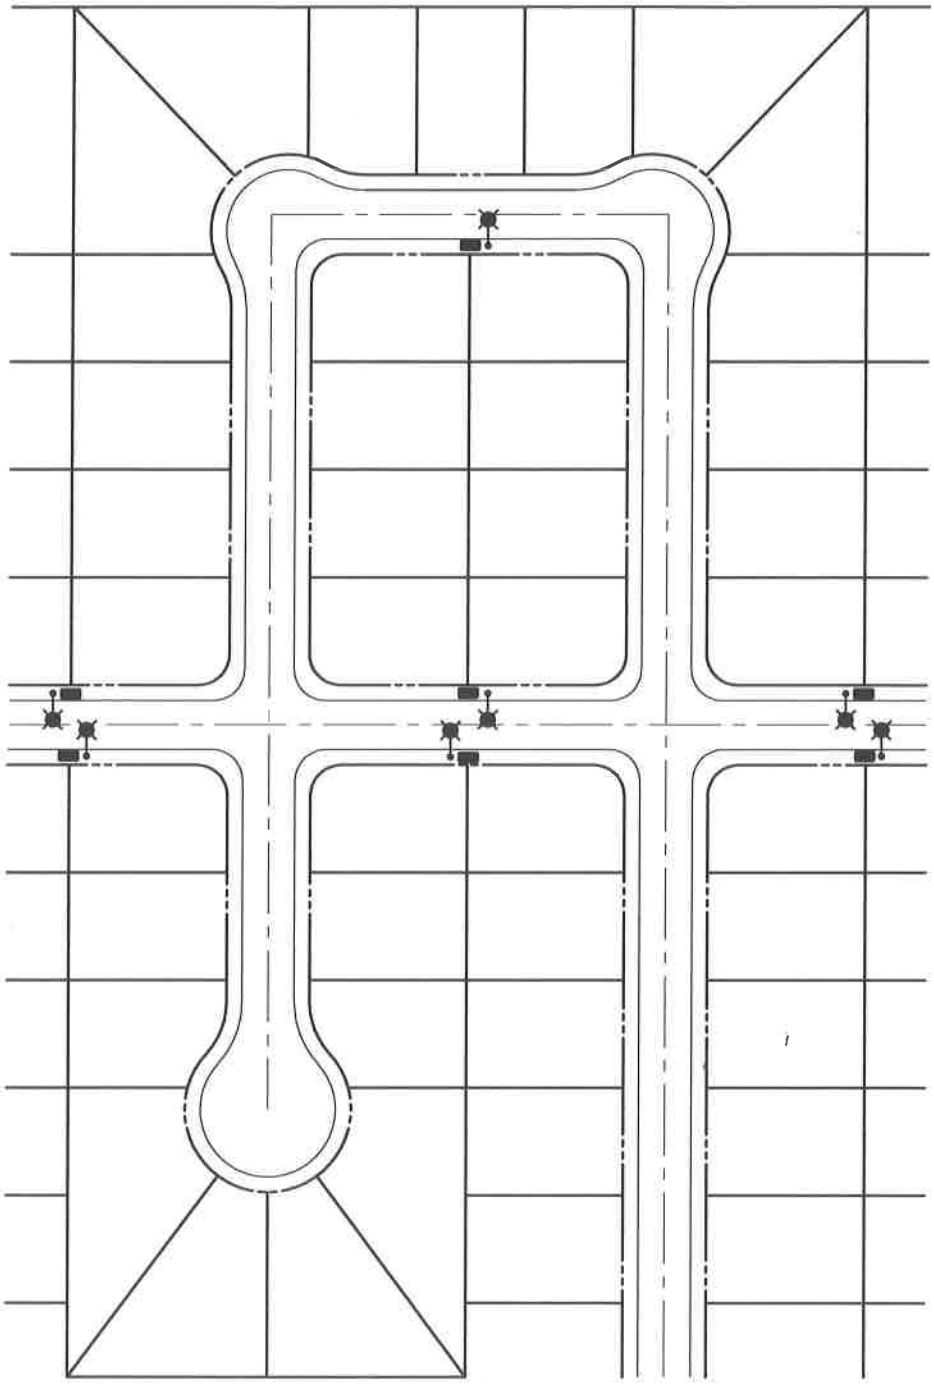

▬ TYPICAL MAILBOX CLUSTER LOCATION

NOTES:

1. MAILBOX CLUSTER LOCATIONS SHALL HAVE A STREET LIGHT LOCATED WITHIN TEN FEET OF THE CLUSTER CONCRETE PAD.

2. ALL MAILBOX CLUSTER LOCATIONS SHALL BE APPROVED BY THE UNITED STATES POSTAL SERVICE PRIOR TO INSTALLATION.

REVISIONS	DATE

CITY OF TULARE
PUBLIC IMPROVEMENT STANDARD

MAILBOX CLUSTER LOCATIONS

DRAWING NO.: 9210

Approved By: Michael W. Miller
Date: 11/15/16 City Engineer

1 OF 1

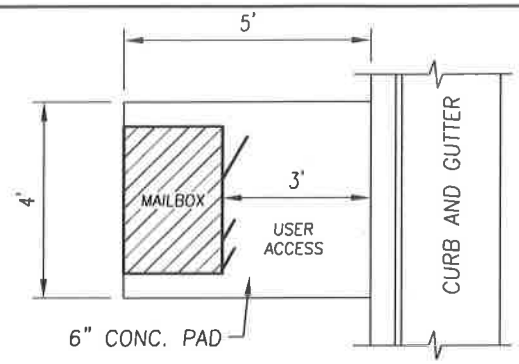

PLAN – WITHOUT SIDEWALK

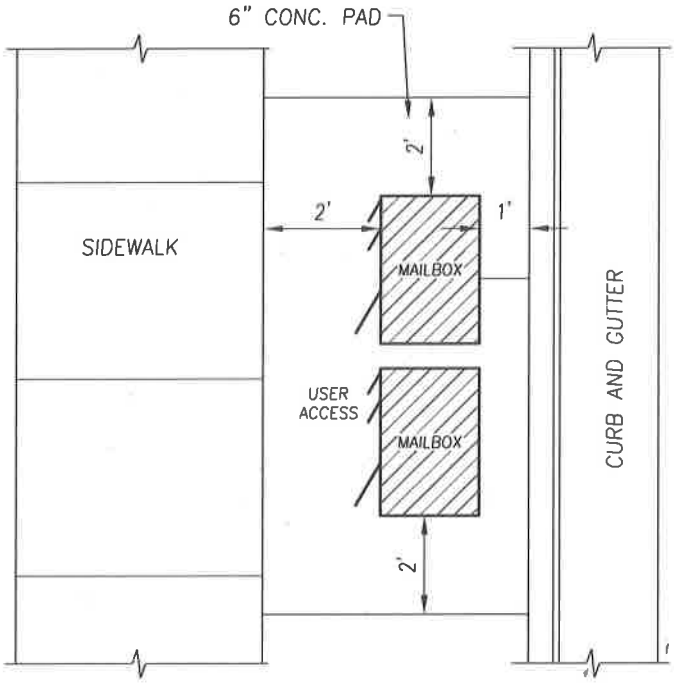

PLAN – WITH SIDEWALK

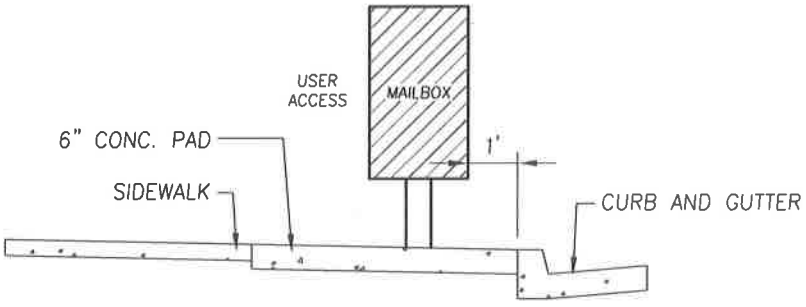

SECTION – WITH SIDEWALK

NOTES:

1. ALL MAILBOX CLUSTER DESIGNS SHALL BE APPROVED BY THE UNITED STATES POSTAL SERVICE PRIOR TO INSTALLATION.
2. ALL MAILBOX CONCRETE PADS SHALL HAVE 4"x6" WELDED WIRE MESH REINFORCEMENT.

REVISIONS	DATE

CITY OF TULARE
PUBLIC IMPROVEMENT STANDARD

MAILBOX CLUSTER DETAIL

DRAWING NO.: 9215

Approved By: Michael W. Miller
Date: 11/15/16 City Engineer

1 OF 1

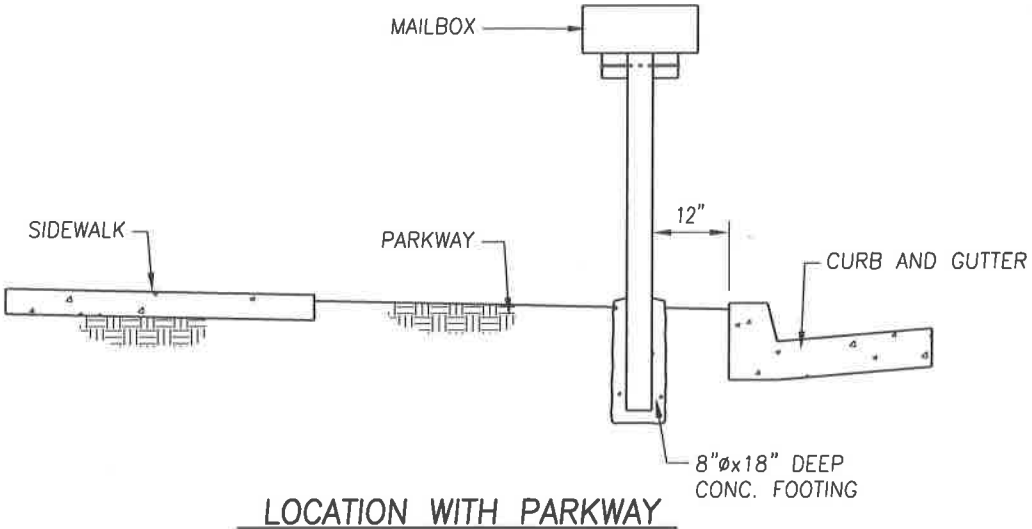

LOCATION WITH PARKWAY

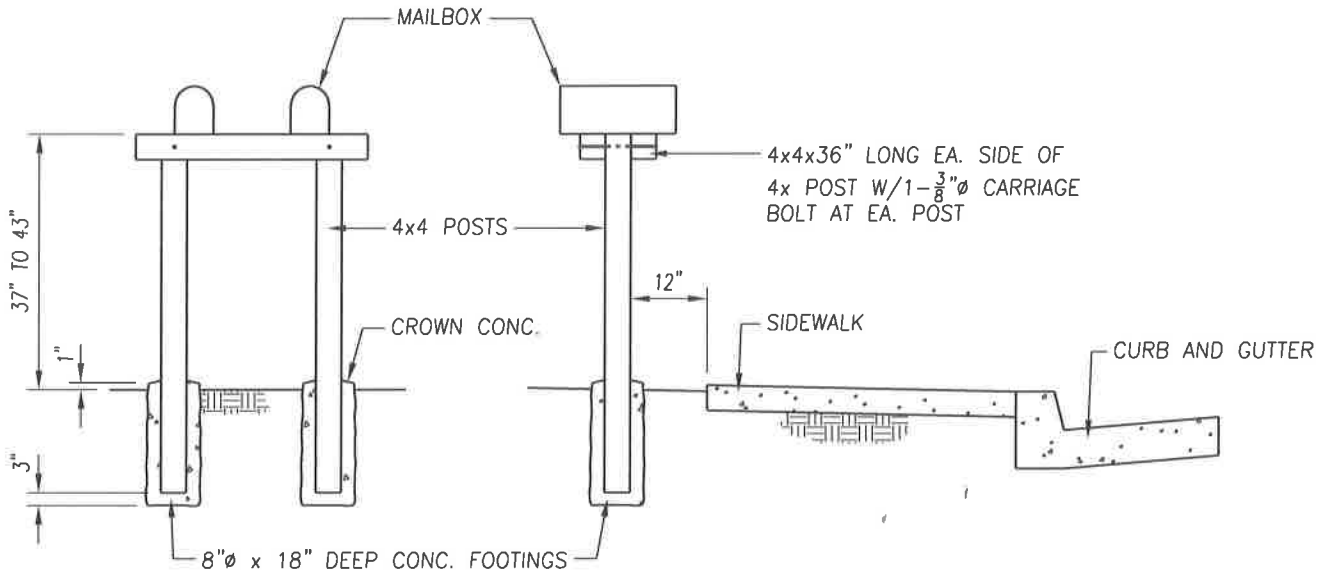

FRONT VIEW

LOCATION WITH ADJACENT SIDEWALK

NOTES:

1. MAILBOXES SHALL BE IN COLLECTIONS OF 2 MINIMUM TO 3 MAXIMUM.
2. MAILBOXES SHALL SERVE HOUSES ON ONE SIDE OF STREET ONLY.
3. HOMEOWNERS SHALL BE RESPONSIBLE FOR ALL MAINTENANCE AND REPAIR.
4. VERTICAL STACKING OF MAILBOXES IS NOT PERMITTED
5. ALL WOOD POSTS SHALL BE NO. 2 PRESSURE TREATED DOUGLAS FIR OR REDWOOD.

REVISIONS	DATE

CITY OF TULARE
PUBLIC IMPROVEMENT STANDARD

MAILBOX - INFILL AND REPLACEMENT ONLY

DRAWING NO.: 9220

Approved By: Michael W. Miller
Date: 11/15/16 City Engineer

1 OF 1

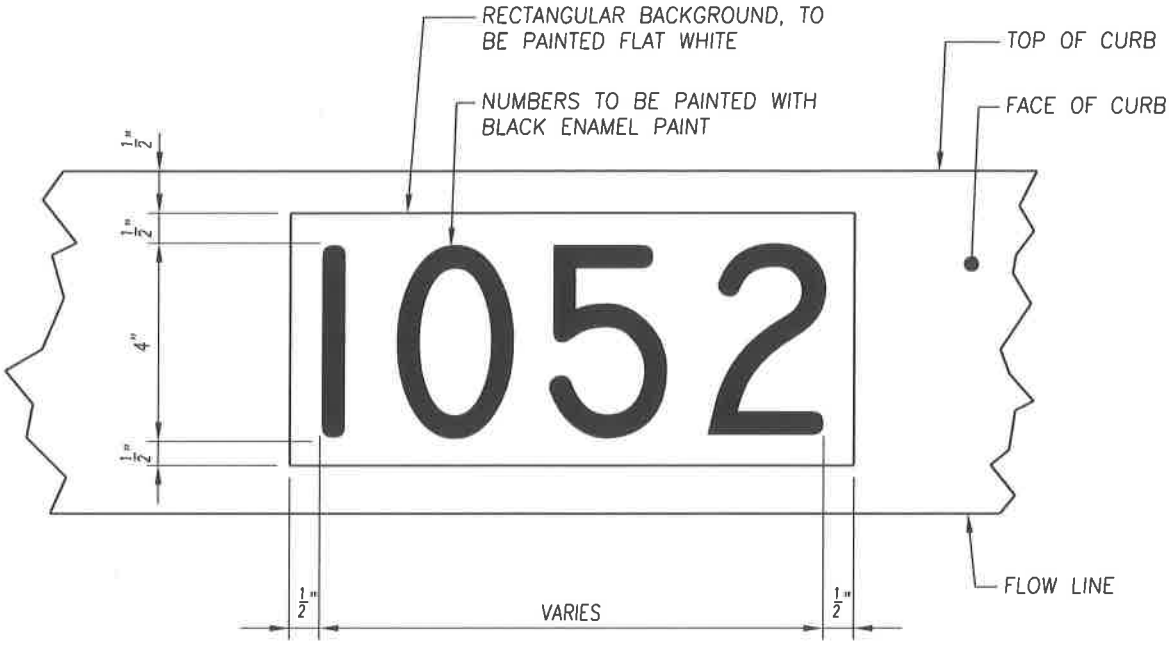

NOTES:

1. HOUSE NUMBERS TO BE PAINTED NEAR THE DRIVEWAY APPROACH ON THE SIDE THAT IS CLOSEST TO THE CENTER OF THE LOT. STENCILS MUST BE APPROVED BY THE CITY ENGINEER.

2. REQUIRES NOTARIZED HOLD HARMLESS AGREEMENT FROM APPLICANT AND AN ENCROACHMENT PERMIT FROM THE ENGINEERING DEPARTMENT TO APPLICANT OBTAINING A CITY BUSINESS LICENSE THROUGH CITY FINANCE DEPARTMENT.

3. RESIDENTS CANNOT BE REQUIRED TO PAY FOR THIS SERVICE, EXCEPT BY WRITTEN AGREEMENT WITH THE RESIDENT WHICH IS ENTERED INTO PRIOR TO PAINTING.

REVISIONS	DATE

CITY OF TULARE
PUBLIC IMPROVEMENT STANDARD

HOUSE NUMBER ON CURB

DRAWING NO.: 9225

Approved By: Michael W. Miller
Date: 11/15/16 City Engineer

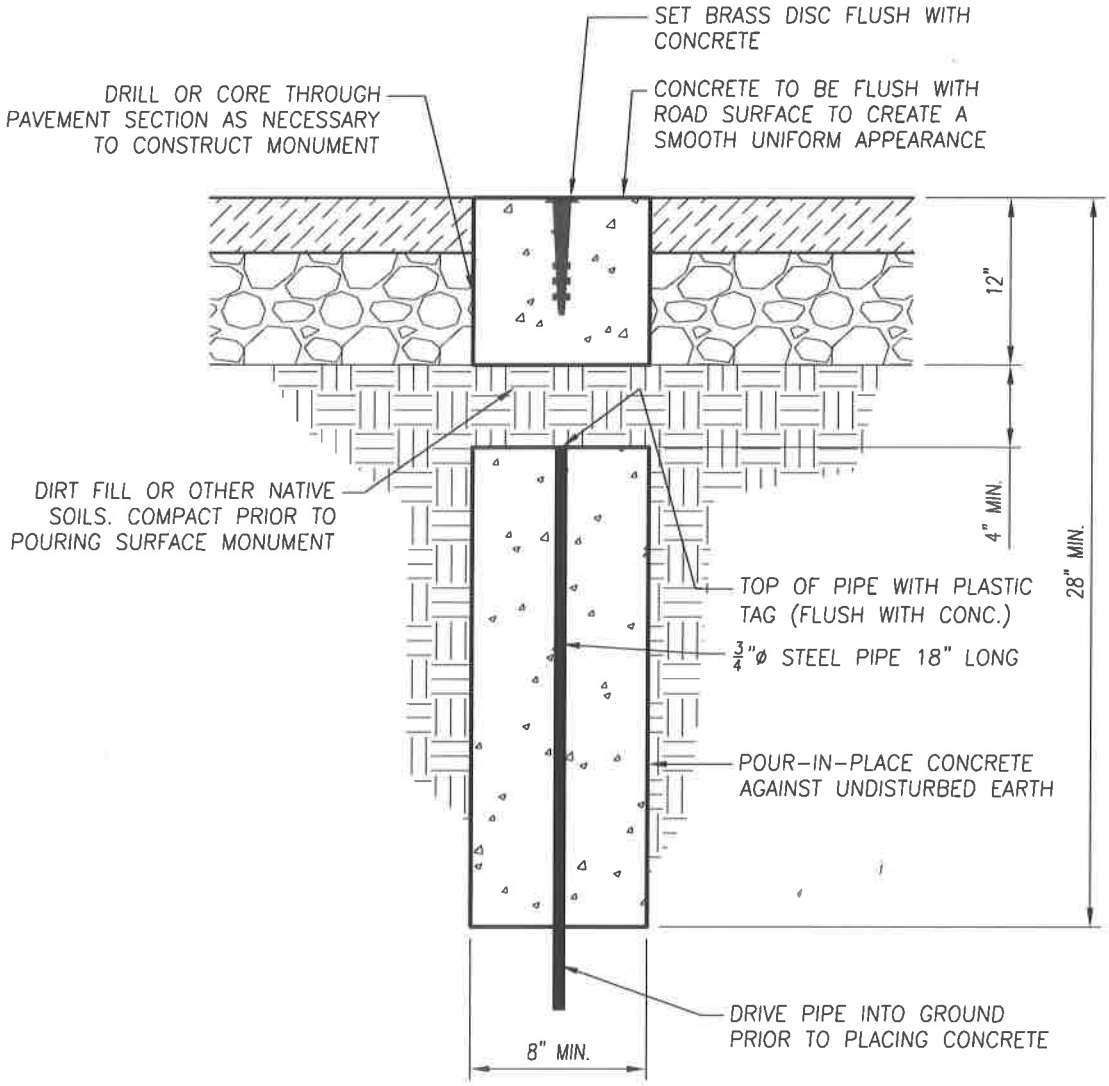

NOTES:

1. SURFACE MONUMENTS SHALL BE PLACED AT LOCATIONS IN THE PUBLIC STREET PER THE DIRECTION OF THE CITY ENGINEER
2. PLASTIC TAG ON REBAR SHALL BE MARKED WITH THE SURVEYOR'S LICENSE NUMBER RESPONSIBLE FOR SETTING THE MONUMENT.
3. MONUMENT SHALL BE 2" DIAMETER FLAT BRASS, WITH CORRUGATED STEM, BY "SURV-KAP" OR EQUAL.
4. THE BRASS DISC SHALL BE STAMPED WITH THE SURVEYOR'S LICENSE NUMBER, WHO IS RESPONSIBLE FOR SETTING THE MONUMENT.
5. BRASS DISC SHALL BE CENTER-PUNCHED BY SURVEYOR UPON COMPLETION OF MONUMENT CONSTRUCTION.

REVISIONS	DATE

CITY OF TULARE
PUBLIC IMPROVEMENT STANDARD

SURFACE SURVEY MARKER

DRAWING NO.: 9310

Approved By: Michael W. Miller
Date: 11/15/16 City Engineer

1 OF 1

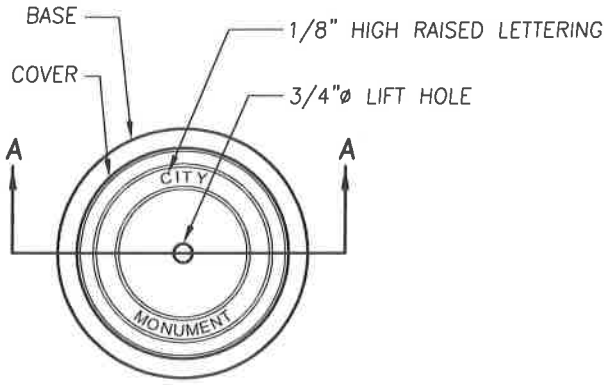

CAST IRON BASE & COVER

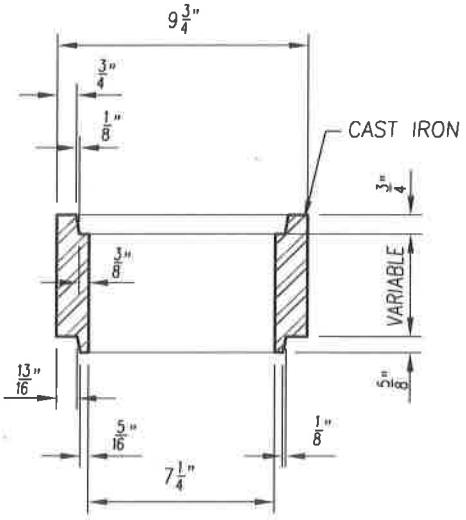

EXTENSION RING SECTION

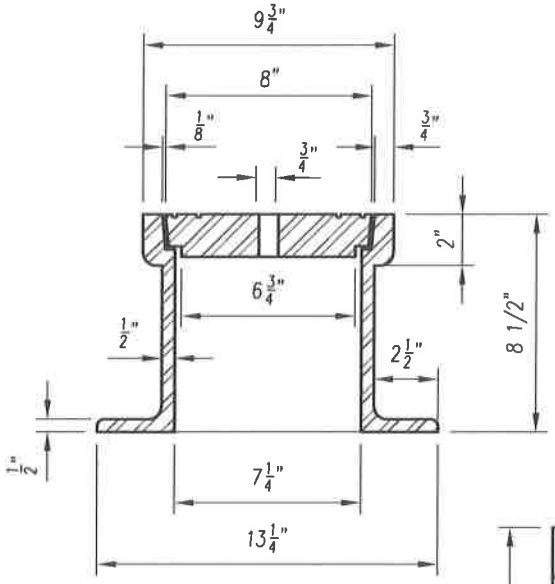

SECTION A–A

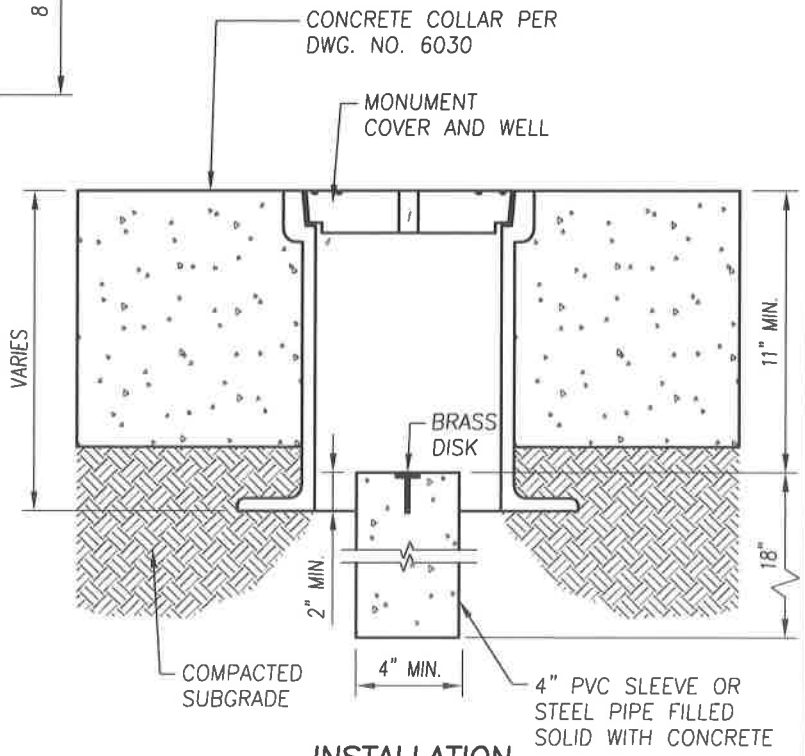

INSTALLATION METHOD

NOTES:

1. BASES, COVERS, & EXTENSIONS TO BE ATLAS FOUNDRY & MFG. CO., RICHMOND, CA.; PINKERTON FOUNDRY, LODI, CA.; OR EQUAL
2. MONUMENT WELLS SHALL BE USED AT SECTION CORNERS, AS DIRECTED BY THE CITY ENGINEER.
3. SEE DWG. NO. 9310 FOR BRASS DISC INFORMATION.

REVISIONS	DATE

CITY OF TULARE
PUBLIC IMPROVEMENT STANDARD

SURVEY MONUMENT & WELL

DRAWING NO.: 9311

Approved By: Michael W. Miller
Date: 11/15/16 City Engineer

1 OF 1

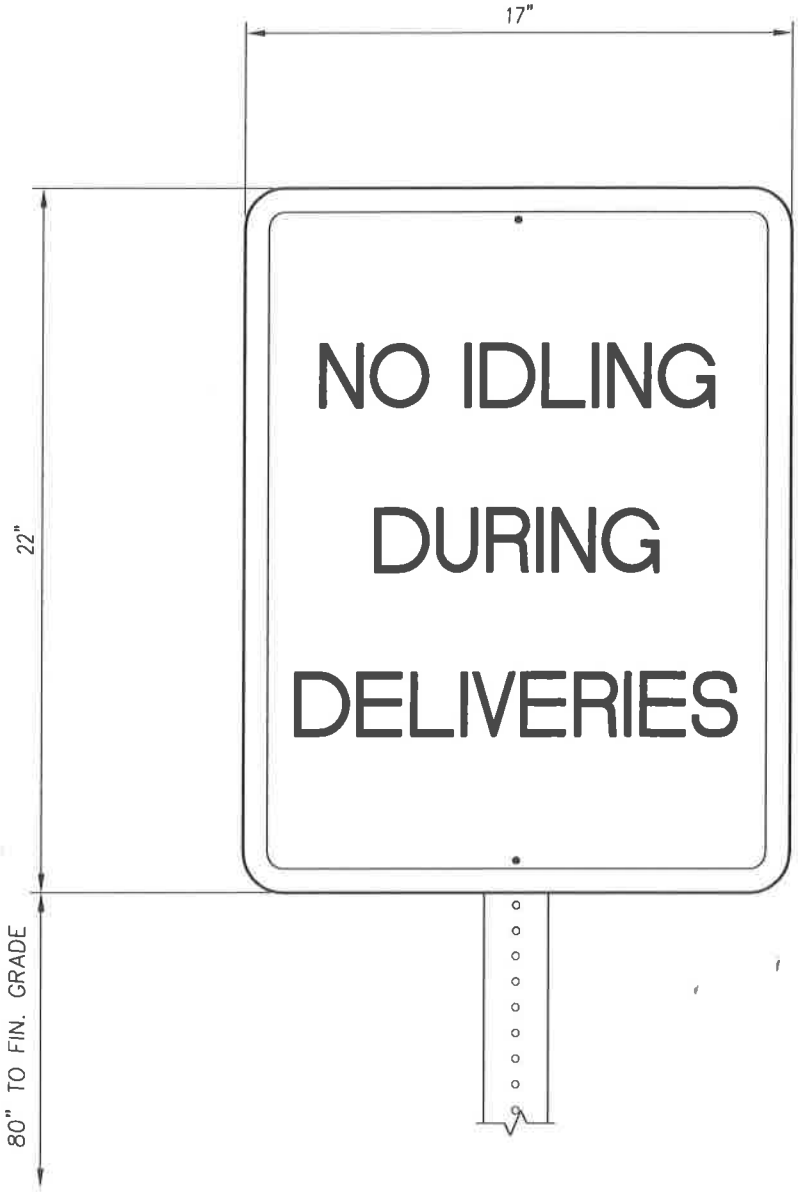

NOTES:

1. SIGN SHALL BE PROMINENTLY POSTED AT LOCATION WHERE DELIVERIES ARE RECEIVED.
2. SIGH SHALL HAVE BLACK LETTERING ON A WHITE BACKGROUND.
3. WORDING SHALL BE SIZED TO FIT SIGN.
4. MOUNT SIGN ON BUILDING OR ON POST SIMILAR TO CITY STANDARD DETAIL 7225.

REVISIONS	DATE

CITY OF TULARE
PUBLIC IMPROVEMENT STANDARD

TRUCK DELIVERY SIGNAGE

DRAWING NO.: 9410

Approved By: Michael W. Miller
Date: 11/15/16 City Engineer

1 OF 1

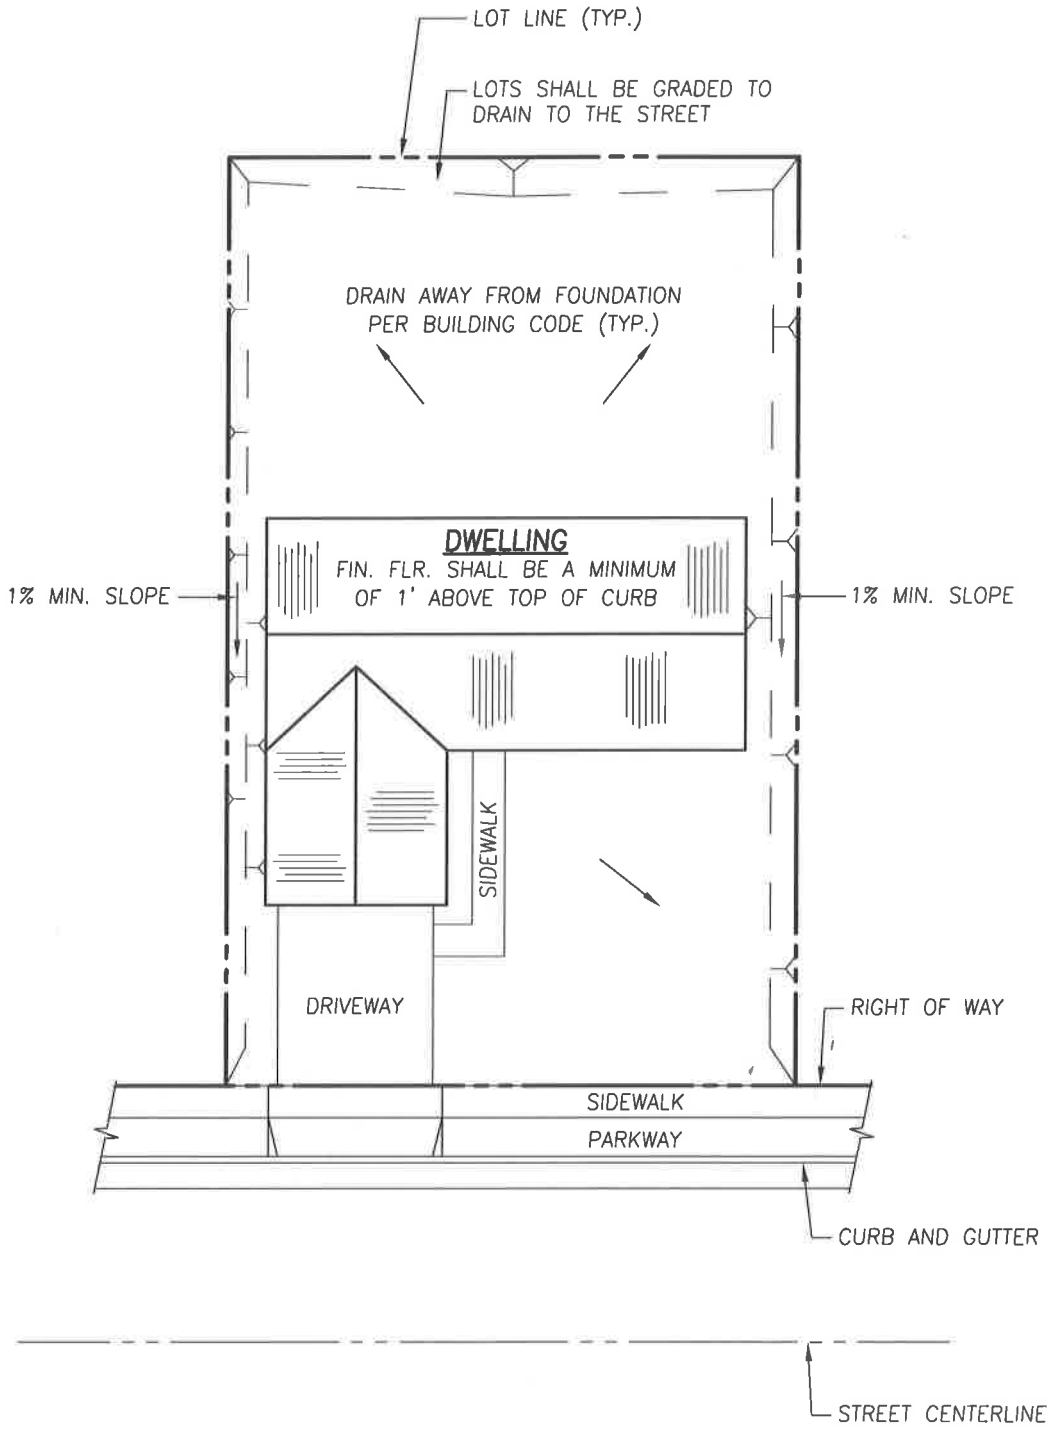

REVISIONS	DATE

CITY OF TULARE
PUBLIC IMPROVEMENT STANDARD

TYPICAL RESIDENTIAL LOT DRAINAGE

DRAWING NO.: 9510

Approved By: Michael W. Miller
Date: 11/15/16 City Engineer

1 OF 1

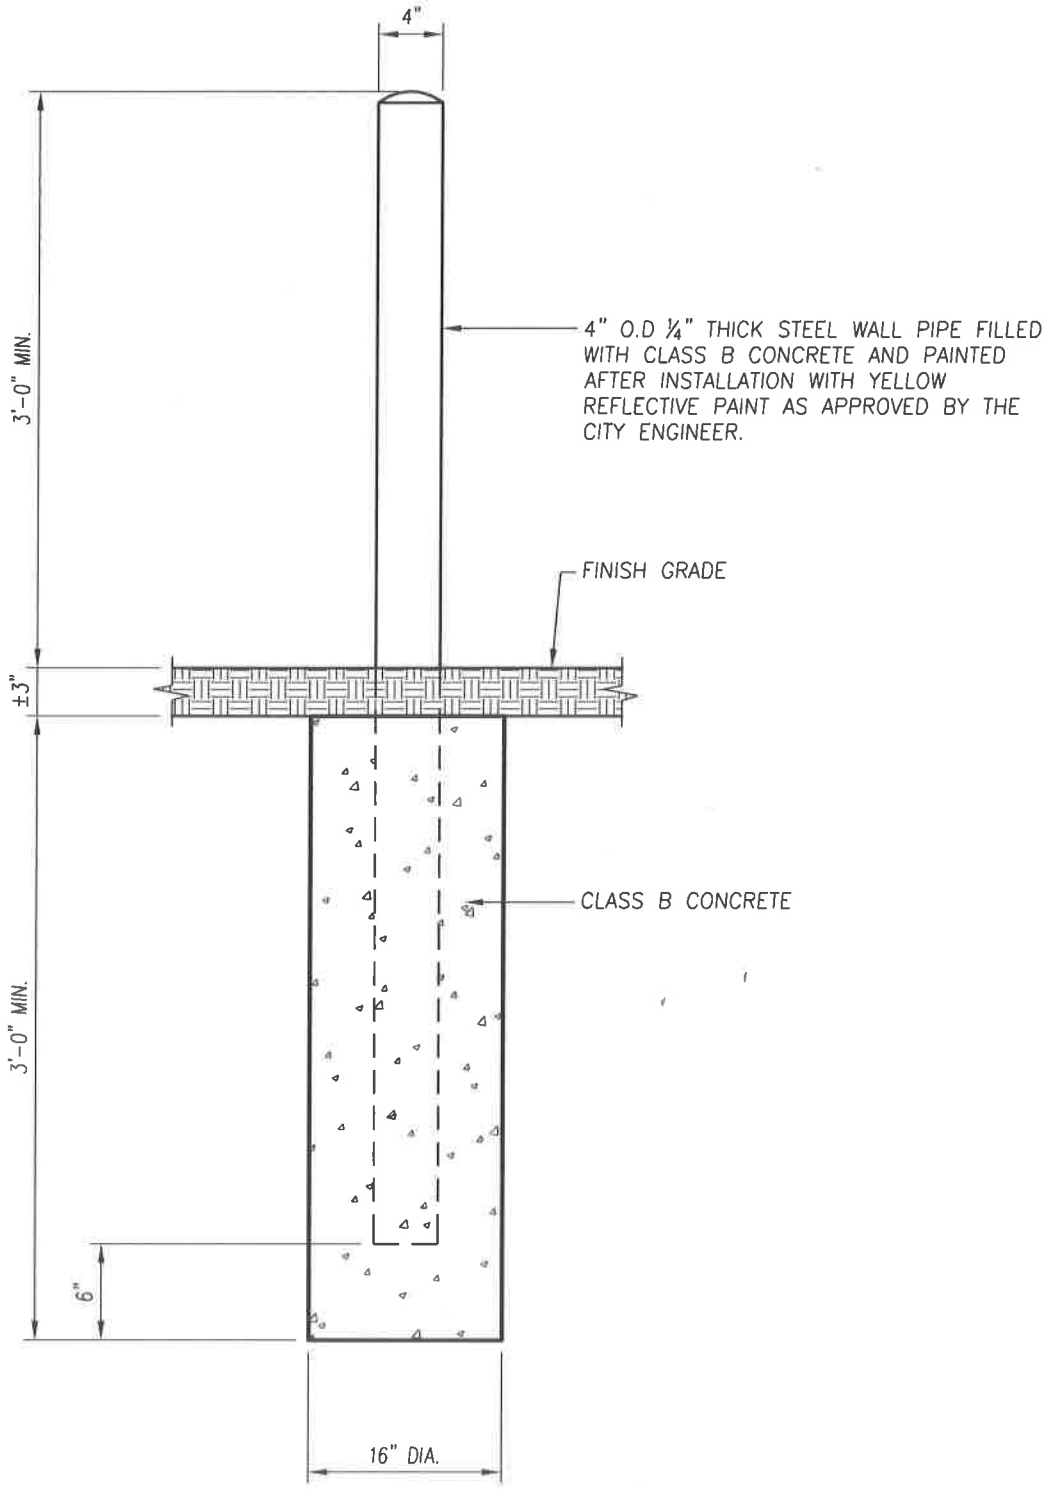

REVISIONS	DATE

CITY OF TULARE
PUBLIC IMPROVEMENT STANDARD

PIPE BOLLARD

DRAWING NO.: 9610

Approved By: Michael W. Miller
Date: 11/15/16 City Engineer